

Datasheet
Duplex stainless steels

# Osprey® 3207

Osprey® 3207 is a hyper-duplex stainless steel with excellent resistance to SCC, pitting and crevice corrosion. It has high resistance to general corrosion and excellent mechanical strength.

# UNS

S33207

### Powder designed for

- · Additive Manufacturing (AM)
- Hot Isostatic Pressing (HIP)



# **Product description**

Osprey® 3207 is a hyper-duplex (austenitic-ferritic) stainless steel characterized by excellent resistance to stress corrosion cracking (SCC), excellent resistance to pitting and crevice corrosion, high resistance to general corrosion and excellent mechanical strength.

#### Main characteristics of Osprey® 3207

- Excellent resistance to pitting and crevice corrosion
- Excellent resistance to stress corrosion cracking (SCC) in hydrogen sulphide (H2S) and chloride containing environments
- High resistance to general corrosion in acidic and caustic environments
- Excellent resistance to erosion corrosion



- Excellent corrosion fatigue properties
- · Exceptionally high mechanical strength
- · Exceptionally high fatigue strength
- Physical properties that offer design advantages
- Good weldability

This metal powder is manufactured by Inert Gas Atomization (IGA), producing a powder with a spherical morphology which provides good flow characteristics and high packing density. In addition, the powder has a low oxygen content and low impurity levels, resulting in a metallurgically clean product with enhanced mechanical performance.

# Chemical composition (nominal), %

Last updated: Jul 17, 2023 4:41 PM CET

Fe	Bal.
Cr	32
Ni	7
Мо	3.5
С	≤0.030
Si	≤0.8
Mn	≤1.5
Р	≤0.035
S	≤0.010
N	0.5



## Powder characteristics and morphology Powder for Additive Manufacturing

Osprey® metal powder for Additive Manufacturing is characterized by a spherical morphology and high packing density, which confer good flow properties. For powder bed processes these are essential when applying fresh powder layers to the bed to ensure uniform and consistent part build.

For blown powder processes, such as Direct Energy Deposition (DED), good flow ensures uniform build rates. Tight control of the particle size distribution also helps ensure good flowability. Low oxygen powders result in clean microstructures and low inclusion levels in the finished parts.

#### **Powder for Hot Isostatic Pressing (HIP)**


Osprey® HIP powder has a spherical morphology, resulting in high packing density. In addition, the powder has a low oxygen content and low impurity levels, resulting in a metallurgically clean product with enhanced mechanical performance.



# Particle size distribution

#### **Powder for Additive Manufacturing**

Osprey® metal powder for Additive Manufacturing is available in a wide range of particle size distributions that are tailored to the individual Additive Manufacturing systems. They can also be tailored to the particular requirements of the end application, both in terms of mechanical performance and surface finish.

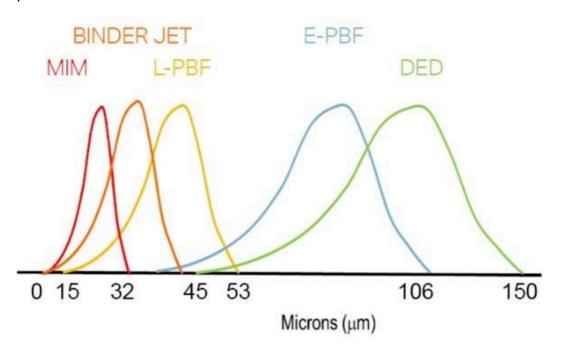

Typical particle size distributions for Additive Manufacturing.

Process technology	Size (µm)
Binder jetting	≤ 16, ≤ 22, ≤ 32, ≤ 38, ≤ 45
Laser - Powder Bed Fusion (L-PBF)	15 to 53 and 10 to 45
Electron beam - Powder Bed Fusion (E-PBF)	45 to 106
Direct Energy Deposition (DED)	53 to 150

#### **Powder for Hot Isostatic Pressing (HIP)**

Osprey® powder for Hot Isostatic Pressing (HIP) is available in a broad size range, typically <250 microns, resulting in a high packing density and tap density. Low oxygen levels, together with high packing density, also facilitate faster sintering.

Tailor-made particle size distributions are available on request. Contact us to discuss your specific requirements.



## **Testing**

All Osprey® metal powders are supplied with a certificate of analysis containing information on the chemical composition and particle size distribution. Information on other powder characteristics is available upon request.

# **Packaging**

A wide range of packaging options are available, from 1 kg (2.2 lb) to 200 kg (440 lb)\*.

Contact our team who can support you with selecting the right packaging for your product and application.

\*Some packaging options may not be available for all products due to international shipping regulations.